



G2 TELESCOPIC CYLINDER



IMPROVED PERFORMANCE

.....
HIGHER LIFTING CAPACITY
.....

.....
FASTER CYCLE TIME
.....

.....
LIGHTER
.....

.....
USES LESS OIL
.....

.....
HIGH PRESSURE CYLINDER
.....

IMPROVED RELIABILITY

.....
100% SALT BATH
NITRIDED
.....

.....
50% LESS COMPONENTS
.....

.....
WEAR AND
CORROSION RESISTANT
.....




Best warranty
in the industry





Best warranty
in the industry

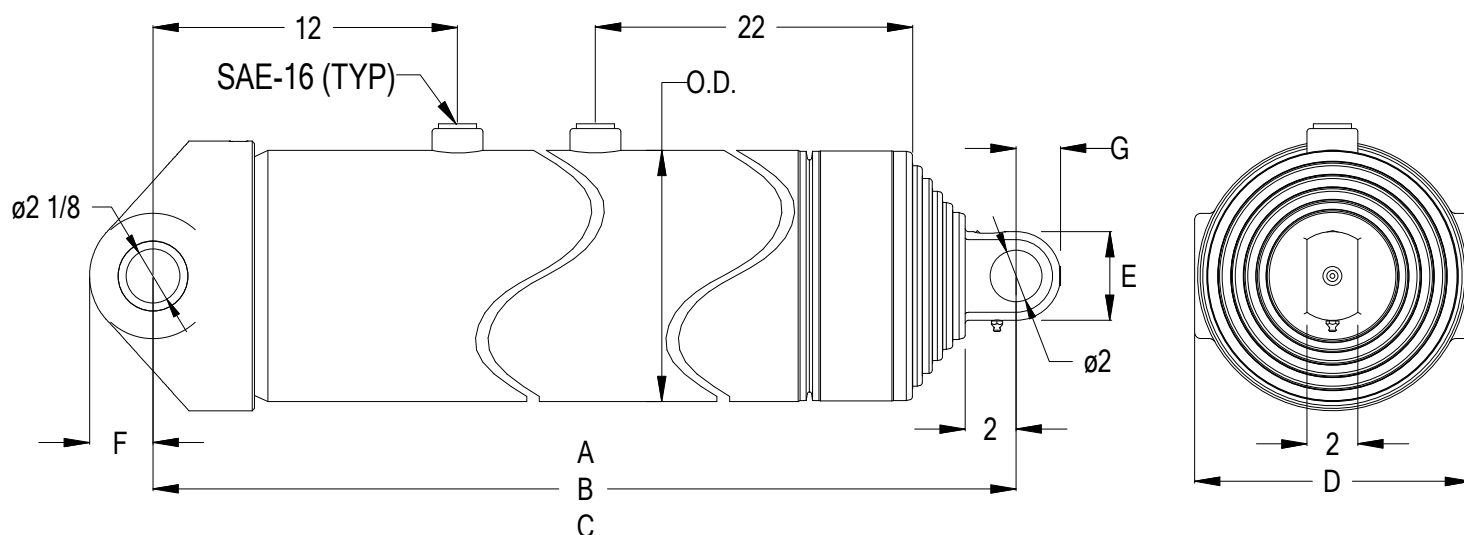

Model - Part Number	A (stroke) [in]	B (closed) [in]	C (opened) [in]	O.D. [in]	D [in]	E [in]	F [in]	G [in]	Working pressure [psi]	Oil volume [gal (US)]	Weight [lb]
G2 - 7.6" MODEL (replaces 8-1/8")											
G2 190-7.6-5 - PG0761905HG0133	184-3/4	53-1/2	238-1/4	8.8	9-1/2	3-1/4	2-3/8	1-5/8	2750	25.2	542
G2 220-7.6-5 - PG0762205HG0128	217-3/16	60	277-3/16	8.8	9-1/2	3-1/4	2-3/8	1-5/8	2750	29.7	608
G2 235-7.6-5 - PG0762355HG0134	234-1/16	63-1/4	297-5/16	8.8	9-1/2	3-1/4	2-3/8	1-5/8	2500	31.7	643
G2 250-7.6-5 - PG0762505HG0135	250-5/16	66-1/2	316-13/16	8.8	9-1/2	3-1/4	2-3/8	1-5/8	2250	34	675
G2 265-7.6-5 - PG0762655HG0126	264-1/16	69-1/4	333-5/16	8.8	9-1/2	3-1/4	2-3/8	1-5/8	2000	35.8	703
G2 - 8.7" MODEL (replaces 9-3/8")											
G2 220-8.7-5 - PG0872205HG0136	220-1/16	61	281-1/16	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2500	39.2	766
G2 235-8.7-5 - PG0872355HG0151	235-1/16	64	299-1/16	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2500	41.9	805
G2 250-8.7-5 - PG0872505HG0137	250-1/16	67	317-1/16	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2500	44.5	843
G2 265-8.7-5 - PG0872655HG0127	262-13/16	69-1/4	332-1/16	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2250	46.3	873
G2 280-8.7-5 - PG0872805HG0138	273-7/8	71-1/2	345-3/8	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2000	48.6	901
G2 300-8.7-5 - PG0873005HG0139	296	76-5/8	372-5/8	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2000	52.6	980
G2 320-8.7-5 - PG0873205HG0140	317-3/16	80-5/8	397-13/16	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2000	56.3	1078
G2 340-8.7-5 - PG0873405HG0141	335	85	420	9.9	10-7/8	3-1/2	2-1/2	1-3/4	2000	60	1138

Subject to change without notice

G2A0516P